



Swapping out a defective Visage Display Unit



STEP 1

Remove the defective VDU

- ⇒ Turn the VDU Off using the power switch on the back of the basket
- ⇒ Remove the two screws that secure the VDU to the basket
- ⇒ While supporting the VDU with one hand, use your other to unplug the Molex connector

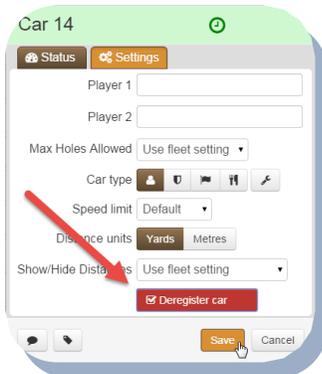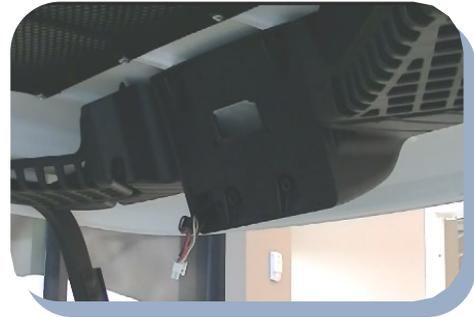

Deregister the car from the Visage Control Center

- ⇒ Access the Car Properties from the Fleet view Cars tab
- ⇒ From the Car Properties Settings tab select Deregister Car, and then click on Save

STEP 2



STEP 3

Install the new VDU

- ⇒ Plug in Molex connector and hang VDU
- ⇒ Secure the VDU by hand tightening the mounting screws
- ⇒ Turn on the power switch located on the back of the basket



Configure Car for your site

- ⇒ Input Site ID
- ⇒ Input Car #
- ⇒ Wait 10 to 30 minutes while in the Visage WiFi covered area for car to download course data and graphics. When complete the VDU will display the course Welcome page.

STEP 4



Need Help? Contact us today!

Tutorials & Live Chat: visagehelp.com

Speak to a C.A.M.: 1-888-575-2901

E-mail: support@gpsindustries.com

Site ID: _____ GPSi Connected Account Manager: _____